


## Obejmy Unifix Maxi

### Maxi 2

(dwuczęściowa obejma uszczelniająca ze stali nierdzewnej)

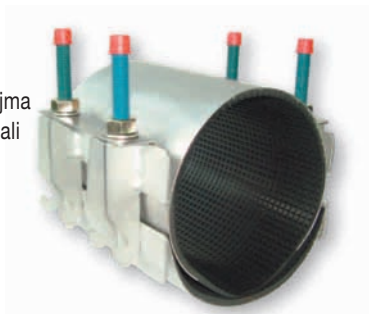

DN	Ø zewnętrzna rury w mm	Długość w mm					
		200	250	300	400	500	600
80	88–110	⊗	X	⊗	X	X	
	100–120	X	X	X	X	X	
100	108–128	⊗	X	⊗	X	X	
	112–134	X	X	⊗	X	X	
	120–140	X	X	X	X	X	
	133–156	X	X	X	X	X	
125	138–160	X	X	⊗	X	X	
	158–180	⊗	X	⊗	X	X	
150	165–185	X	X	X	X	X	
	168–190	X	X	X	X	X	
	176–196	X	X	X	X	X	
	190–210	X	X	X	X	X	
175	195–217	X	X	X	X	X	
	210–230	⊗	X	⊗	X	X	
200	216–238	X	X	X	X	X	
	225–246	X	X	X	X	X	
	230–250	X	X	X	X	X	
	238–260		X	X	X	X	
	250–271		X	X	X	X	

DN	Ø zewnętrzna rury w mm	Długość w mm					
		200	250	300	400	500	600
200	269–289		X	X	X	X	
250	273–293			⊗	X	X	
	282–302			X	X	X	
	295–315			X	X	X	
300	314–335			X	X	X	X
	322–344			X	X	X	X
	337–358			X	X	X	X
350	347–368			X	X	X	X
	365–385			X	X	X	X
	382–402				X	X	X
	396–420				X	X	X
400	410–430				X	X	X
	420–440				X	X	X
	435–455					X	X
450	450–470					X	X
	457–477					X	X
	485–508					X	X
500	510–530					X	X

Na życzenie dostępna również dla zewnętrznej średnicy rur do 855 mm i o długości 800 mm.

⊗ = z NBR pozycje dostępne na naszym magazynie