




## Maxi 3

(trzęściowa obejma uszczelniająca ze stali nierdzewnej)

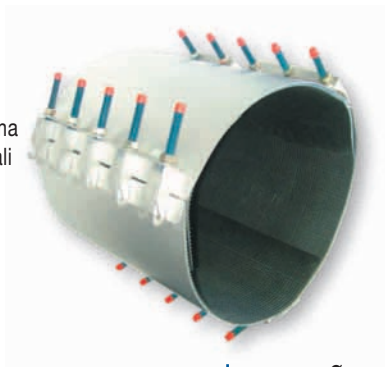

DN	Ø zewnętrzna rury w mm	Długość w mm				
		300	400	500	600	700
<b>250</b>	270–300	X	X			
<b>300</b>	310–340	X	X			
	335–365	X	X			
<b>350</b>	340–370	X	X			
	360–390	X	X	X		
	385–415	X	X	X		
	395–425	X	X	X		
<b>400</b>	400–430	X	X	X		
	410–440	X	X	X		
	430–460	X	X	X		
	435–465	X	X	X	X	X
<b>450</b>	440–470	X	X	X	X	X
	460–490	X	X	X	X	X
	475–505	X	X	X	X	X
<b>500</b>	485–515		X	X	X	X
	510–540			X	X	X
	530–560			X	X	X
	535–565				X	X

(X) = z NBR pozycje dostępne na naszym magazynie

DN	Ø zewnętrzna rury w mm	Długość w mm				
		300	400	500	600	700
<b>500</b>	555– 585				X	X
	570– 600				X	X
<b>600</b>	585– 615				X	X
	610– 640				X	X
	620– 650				X	X
	630– 660				X	X
	654– 684				X	X
<b>700</b>	702– 732				X	X
	711– 741				X	X
	<b>750</b>	747– 777				X
780– 810					X	X
<b>800</b>	813– 843				X	X
	852– 882				X	X
	864– 894				X	X
	<b>900</b>	900– 930				X
925– 955					X	X
945– 975					X	X
970–1000					X	X